


The following guide contains recommendations regarding the installation of HARMONY “Silhouette” wall tiles however this is not a step by step procedure.

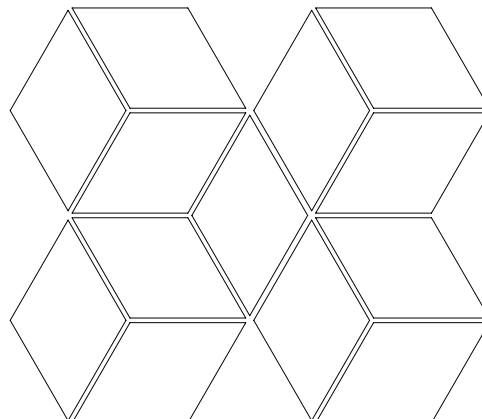

TOOLS RECOMMENDED

Brayer style rubber roller

Exacto knife or scissors

Structural adhesive (optional)

1” HARMONY supplied double sided tape (or equivalent)

Level

HARMONY tile spacers (qty. 2)

DISCLAIMERS

- HARMONY does not accept responsibility for installation and recommends the installation be completed by experienced and professional trades-persons.
- HARMONY tiles are semi-rigid products that require care when handling to prevent bending, creasing or damage.
- The inadequate use or use of inferior double-sided tape will affect the longevity of the installation.
- Should a section of double-sided tape require repositioning that section of tape must be replaced with new tape.
- The colour between different tiles may vary slightly due to the manufacturing process. HARMONY panels tend to have a smooth and a rough side. To compensate for slight variations in colour HARMONY recommends the rough side of a tile be installed against the substrate
- Refer to the HARMONY Tape Application Guide for the installation of double-sided tape

Tile Positioning: To ensure correct positioning and alignment complete a trial fit of the wall tiles using a level and small pieces of double sided tape. The use of a plumb chalk line is recommended to ensure correct alignment when multiple tiles are installed on the same wall. It is recommended to establish a “middle” tile and a “middle” start point for complex installations.

Thank you for your order!



For questions or concerns regarding product or installation please contact us at 519-451-4118 or via email at hello@harmonyspaces.ca

Creating peaceful spaces in **HARMONY**

METHOD 1


Application with Double-sided Tape

1. Apply double sided tape around the perimeter of each tile approximately 6mm (¼") from the outer edges.
2. With even pressure burnish the tape to the tile using a rubber roller.
3. For larger tiles apply one or more additional strips of double-sided tape vertically on each tile.
4. Remove the tape paper backing and using a level or previously marked position line install the first tile to the substrate in the location previously marked.

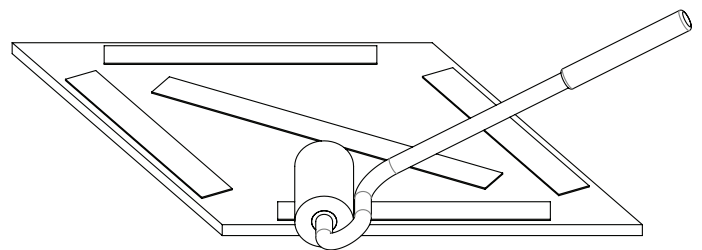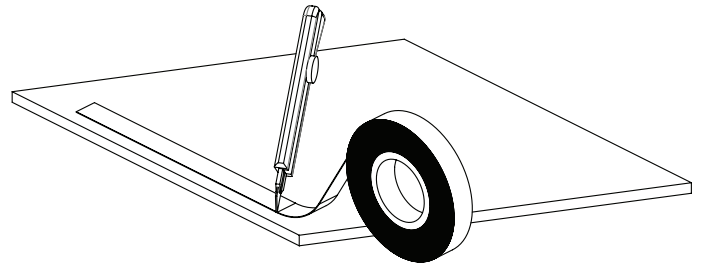

NOTE: Failure to install the first tile correctly will result in misalignment of the remaining wall tiles.

5. Remove the tape paper backing, align and install the remaining tiles.
6. If spacing is preferred between tiles, use HARMONY spacers specific to the silhouette tile being used. HARMONY recommends the use of 2 tile spacers for installation of the remaining tiles. Each Silhouette tile has a specific spacer designed to provide the correct spacing and alignment for that design of tile.
7. Apply even pressure and burnish each tile to the substrate.

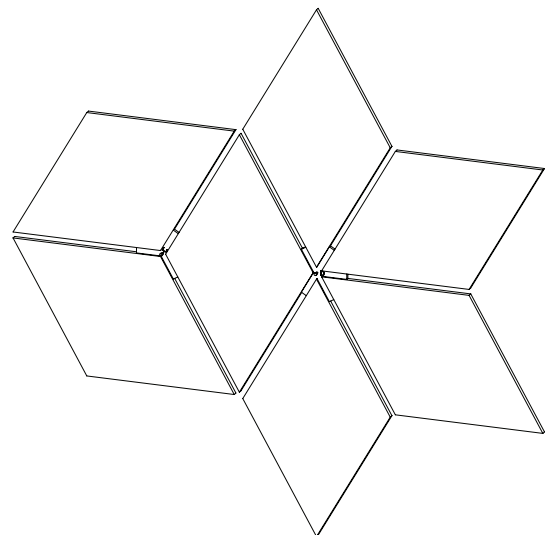

METHOD 2

Application with Double-sided Tape and Construction Adhesive

1. Follow STEPS 1 and 2 of Method 1.
3. For larger tiles or for enhanced adhesion apply small beads of construction adhesive 300mm (12") apart to the remaining areas on the back of the tile. To prevent adhesive from creeping out from under the tile keep adhesive 12mm (½") away from panel edges.
4. Complete STEPS 4 through 7 of Method 1.

